

## SPECIFICATIONS

MODEL NUMBER	POWER	BORE	STROKE	ROD	RAM SPEED		CAPACITY (TONS)	WEIGHT (LBS.)	SHIPPING DIMENSIONS		
					PRESS	RETURN			L	W	H
HFP-30	5 HP 230 1 PH	5"	16"	2.5"	29 IPM	38 IPM	30	1,400	48"	62"	88"

Standard voltages available - please specify when ordering.


### H FRAME PRESS 30 Ton

#### STANDARD FEATURES

- ✓ **Electric / Hydraulic operation** provides smooth, consistent pressing action.
- ✓ **Open sides** to facilitate work on long pieces.
- ✓ **Flat ram nose** can be easily changed to allow the user to adapt the press to a specific job.
- ✓ **Quality Baldor motor**, low speed.
- ✓ **Low speed pump** - quiet, dependable operation.
- ✓ **Self-locking table design** eliminates lateral movement.
- ✓ **Double-acting cylinder** permits pulling as well as pressing ram action.
- ✓ **Hydraulic power-lift** for vertical displacement of table.
- ✓ **Cylinder activation** is fingertip controlled, the more the hand lever is engaged the more the ram movement is accelerated. This allows the operator to control the proper speed for the task.
- ✓ **High capacity** 10 GAL. hydraulic oil reservoir.
- ✓ **Low pressure hydraulic system** maintains lower oil temperatures, resulting in higher efficiency and safer operation.
- ✓ **All hydraulic and mechanical parts** are standard in the industry, and available throughout North America.

### DIMENSIONS (INCHES)

MODEL	A	B	C	D	E	F
HFP-30	75	42	54	34	9	30

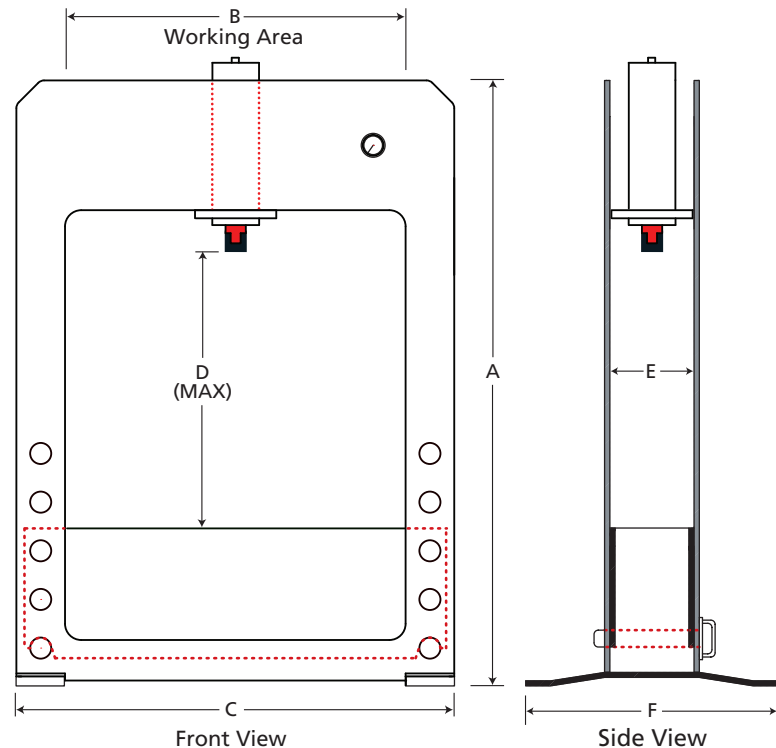

#### AVAILABLE OPTIONS

- PR-30** Pressure regulator to limit the ram pressure.
- VB-30** V BLOCKS matched pair.
- FSG-30** Front safety guard for operator protection.
- FPS-30** Foot pedal-electric solenoid valve for hands-free operation, c/w electric control panel.
- ASC-30** Adjustable stroke control c/w foot pedal-electric solenoid valve, speed control, and electric control panel.
- 5-24** 24 Inch stroke cylinder.
- SSE-30** Stop / Start c/w emergency stop button, wired direct to motor.

Custom designs available  
*We Build Them your Way!*